


KIOSK.1

Double-sided Trail Kiosk

The KIOSK.1 Sign type is a covered pedestrian information kiosk and should be located at major entry points to the Northeast Indiana United Trails. Public parking must be available at these entry points. The municipality where the sign is located will be responsible for content on the main graphic panel.

This sign is located at least 3 ft from the trail and is intended for pedestrians, rather than cyclists in motion.

The back of the sign panels for both KIOSK.1 are unpainted aluminum with a protective clear coat applied.

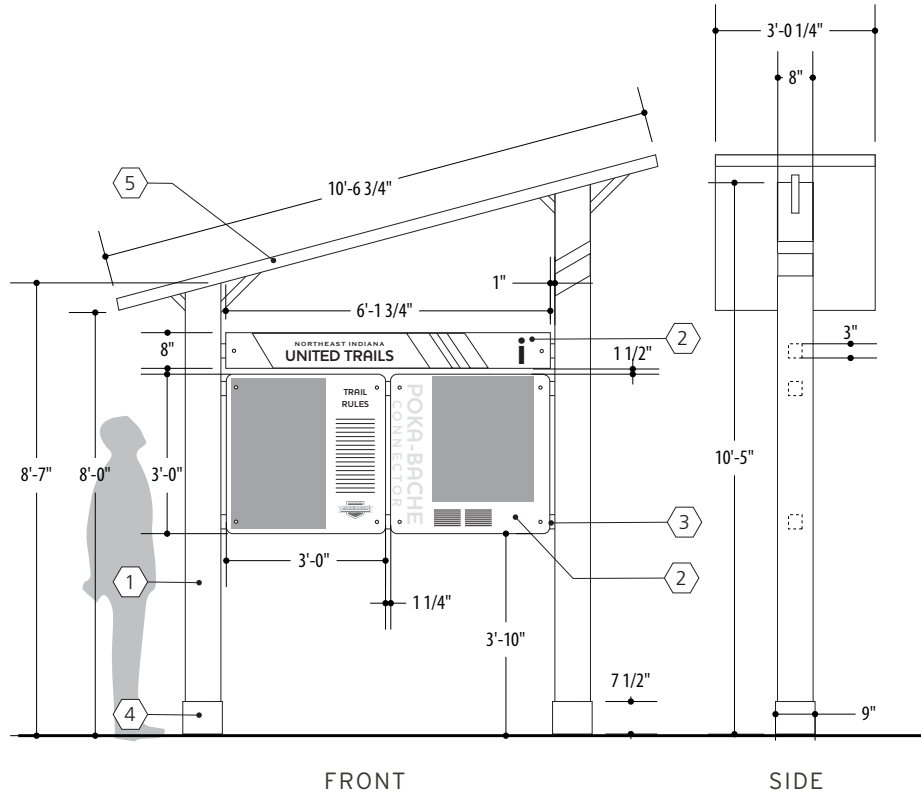

1 Elevations KIOSK.1
scale: 1/4"=1'-0"

- 1 8" aluminum square posts
- 2 Graphic panel, mechanically fastened to 3" aluminum sq tube
- 3 Painted 3" sq tube welded to 8" square posts
- 4 Aluminum base wrap - unpainted, clearcoat protectant
- 5 Aluminum roof construction with support beams welded to 8" posts

NOTES:
Locate sign edge of trail
Posts attached with plate-to-plate footer.
Requires concrete footer

These drawings are meant for DESIGN INTENT ONLY and are not for construction. Contractor shall verify and be responsible for all dimensions and conditions of the job. Contractor shall be familiar with the site and conditions it presents. NIRCC or the Municipality requesting shop drawings-must be notified of any variations from the dimensions and conditions shown on this drawing. Shop drawings and details must be submitted to NIRCC or the Municipality for approval prior to proceeding with fabrication. All text shall be proofread by client and legal requirements checked by legal department.